

Test acoustique

CHANCE RM 774 Maps

ÉLITIS



Fréquence (Hz)	α
125	0.03
160	0
200	0.04
250	0.03
315	0.04
400	0.08
500	0.12
630	0.14
800	0.23
1000	0.31
1250	0.35
1600	0.44
2000	0.55
2500	0.65
3150	0.64
4000	0.64
5000	0.56
6300	0.52

Table 1 : **CHANCE Maps - RM 774**

Coefficient d'absorption en fonction de la fréquence par bande de tiers d'octave

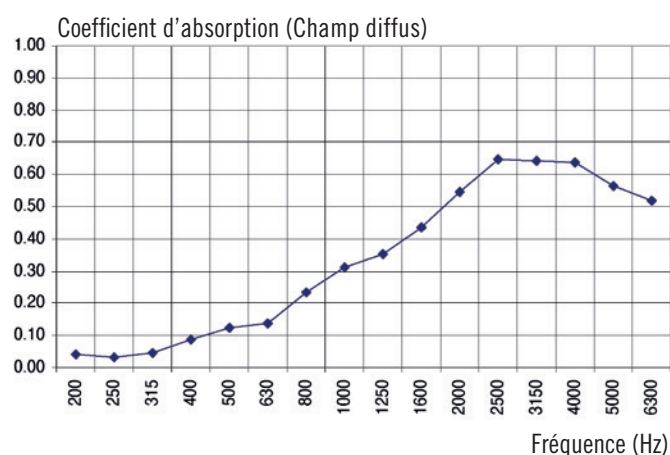


Figure 1 : **CHANCE Maps - RM 774**

Coefficient d'absorption acoustique de l'échantillon RM 774 31 en fonction de la fréquence par bande de tiers d'octave

Fréquence (Hz)	α
250	0.04
500	0.12
1000	0.30
2000	0.54
4000	0.61
α_{ω}	0.20 (H)

Table 2 : **CHANCE Maps - RM 774**

Coefficient d'absorption en fonction de la fréquence par bande d'octave et indice unique α_{ω}

CHANCE RM 774 Maps



Frequency (Hz)	α
125	0.03
160	0
200	0.04
250	0.03
315	0.04
400	0.08
500	0.12
630	0.14
800	0.23
1000	0.31
1250	0.35
1600	0.44
2000	0.55
2500	0.65
3150	0.64
4000	0.64
5000	0.56
6300	0.52

Table 1 : **CHANCE Maps - RM 774**

Sound absorption coefficient as a function of the frequency in third-octave bands.

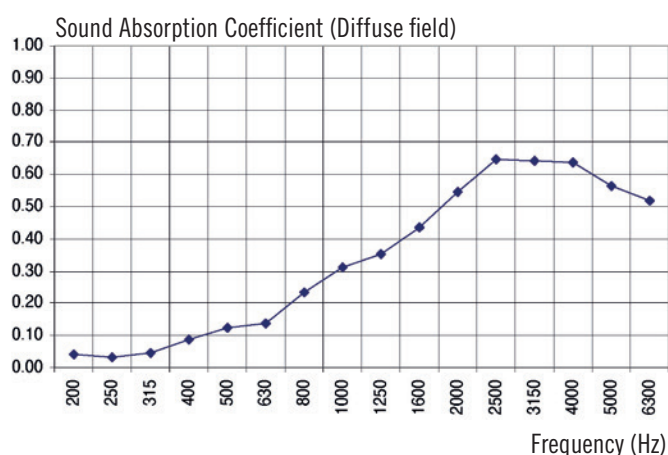


Figure 1 : **CHANCE Maps - RM 774**

Sound absorption coefficient of the sample RM 774 31 as a function of the frequency

Frequency (Hz)	α
250	0.04
500	0.12
1000	0.30
2000	0.54
4000	0.61
α_{ω}	0.20 (H)

Table 2 : **CHANCE Maps - RM 774**

Sound absorption coefficient as a function of the frequency in octave bands and single-value rating α_{ω}